

WOOD MOSAICS

installation instructions with epoxy mortar



1 Open the product pack.



2 In the pack is the catalyst (component B). Cut the angle of the catalyst envelope.



3 Pour all the catalyst (component B) in the component A.



4 Mix with care the mixture to catalyze all the product.




5 The packages are dosed to make no errors. The mixture is workable for about 45 minutes at +23°C.



6 Put the mixture on the tile.



7 Stick the mixture in the tile groutings, with a rubberized flat trowel.

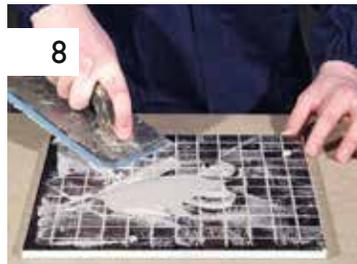

8 Make diagonal movements by the tile groutings.



9 Cover all the tile groutings with the mixture.



10 Take away the excess mixture with the rubberized flat trowel.




11 Make cleanliness and finishing with the fresh mixture.



12 Use clean water. Exchange frequently the washing water and the felt, if soaked in mixture.

WOOD MOSAICS


installation instructions with epoxy mortar

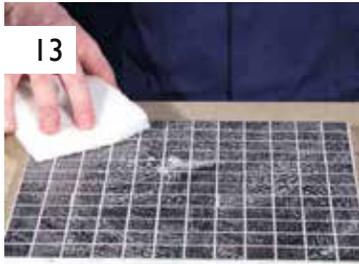

13 Put clean water on the tile. Make a first cleanliness with circular movements.



14 Pay attention to not to empty the tile groutings. Erase all the halos from the surface.

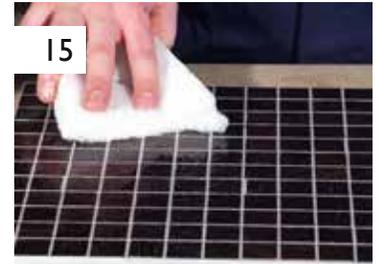

15 Seal the tesseras and remove the excess mixture from the tile.




16 Use clean water. Exchange frequently the washing water and the sponge, if soaked in mixture.



17 Make a second cleanliness with a rigid sponge to have a smooth and closed surface.




18 Remove the mixture from the tesseras, without emptying the groutings, and drying the excess water.




19 After at least 20 minutes you can erase the transparent halos.



20 Mix the same quantity of alkaline-based liquid cleaner with clean water.

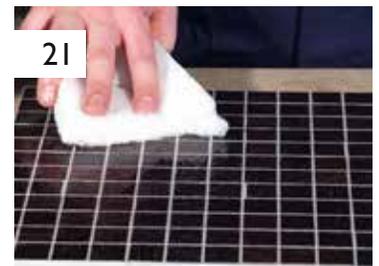

21 Place the mixed solution onto the tile.



22 Keep the solution on the tile for 15 minutes.



23 Rinse out with clean water.